


FURO CÓNICO



industry partners

TAPER LOCK

FIGURASYDIMENSIONES

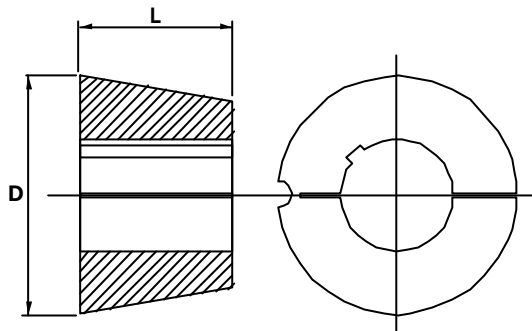

REIERENCIA	Diametro de eje	CASQUILLO		TORNILLOS				
		L (mm)	D Ømax (mm)	Nº	Rosca Withworth (")	Long. (mm)	Tipo llave hex.	Ms (Nm)
1008	(mm) 11 12 14 15 16 18 19 20 22 24 25 (") 3/8 1/2 5/8 3/4 7/8 1	22,3	35	2	1/4	13	M3	55
1108	(mm) 11 12 14 15 16 17 18 19 20 22 24 25 26 27 28 (") 3/8 1/2 5/8 3/4 7/8 1 1 1/8	22,3	38	2	1/4	13	M3	55
1210	(mm) 12 14 15 16 18 19 20 22 24 25 26 28 30 32 (") 1/2 5/8 3/4 7/8 1 1 1/8 1 1/4 1 1/2	25,4	47	2	3/8	16	M5	20
1215	(mm) 12 14 15 16 18 19 20 22 24 25 26 28 30 32 (") 1/2 5/8 3/4 7/8 1 1 1/8 1 1/4	38,1	47	2	3/8	16	M5	20
1310	(mm) 14 16 18 19 20 22 24 25 28 30 32 35 (") 1/2 5/8 3/4 7/8 1 1 1/8 1 1/4 1 1/2	25,4	52	2	3/8	16	M5	20
1610	(mm) 12 14 15 16 18 19 20 22 24 25 26 28 30 32 35 38 40 42 (") 3/8 1/2 5/8 3/4 7/8 1 1 1/8 1 1/4 1 1/2 1 3/4 1 1/2 1 5/8	25,4	57	2	3/8	16	M5	20
1615	(mm) 12 14 15 16 18 19 20 22 24 25 26 28 30 32 35 38 40 42 (") 1/2 5/8 3/4 7/8 1 1 1/8 1 1/4 1 1/2 1 3/4 1 1/2 1 5/8 1 3/4	38,1	57	2	3/8	16	M5	20
2012	(mm) 14 15 16 18 19 20 22 24 25 26 28 30 32 35 38 40 42 45 48 50 55 60 65 (") 5/8 3/4 7/8 1 1 1/8 1 1/4 1 1/2 1 3/4 1 1/2 1 5/8 2	31,8	70	2	7/16	22	M6	30
2517	(mm) 18 19 20 22 24 25 28 30 32 35 38 40 42 45 48 50 55 60 65 (") 3/4 7/8 1 1 1/8 1 1/4 1 1/2 1 3/4 1 1/2 1 5/8 2 2 1/8 2 1/4 2 1/2 2 3/4	44,5	85	2	1/2	25	M6	50
3020	(mm) 22 25 28 30 32 35 38 40 42 45 48 50 55 57 60 65 70 75 (") 1 1/8 1 3/8 1 1/2 1 5/8 1 3/4 2 2 1/8 2 1/4 2 1/2 2 3/4 2 1/2 3	50,8	108	2	5/8	32	M8	90
3030	(mm) 42 45 47 48 50 55 60 65 70 75 (") 1 1/4 1 3/8 1 1/2 1 5/8 1 3/4 2 2 1/8 2 1/4 2 1/2 2 3/4 2 1/2 3	76,2	108	2	5/8	32	M8	90
3535	(mm) 25 35 38 40 42 45 48 50 55 60 65 70 75 80 85 90 (") 1 1/2 1 3/8 1 1/4 1 1/2 2 2 1/8 2 1/4 2 1/2 2 3/4 2 1/2 3 3 1/8 3 1/4 3 3/8 3 1/2	88,9	127	3	1/2	38	M10	115
4040	(mm) 45 50 55 60 65 70 75 80 85 90 95 100 (") 1 3/4 2 2 3/8 3 1/2 3 3/4 4	101,6	146	3	5/8	44	M14	170
4545	(mm) 55 60 65 70 75 80 85 90 95 100 105 110 (") 3 3 1/2 4	114,3	162	3	3/4	51	M14	195
5050	(mm) 50 60 65 70 75 80 85 90 95 100 105 110 115 120 125 (") 3 1/2 4	127	178	3	7/8	57	M17	275

Estesignoindicaloscasquillosfabricadosenacero,siendonormalmentelosotrossuministradosenfundición